


CAST STEEL SWING CHECK VALVES

150 Lbs

DT-CSVBS-150

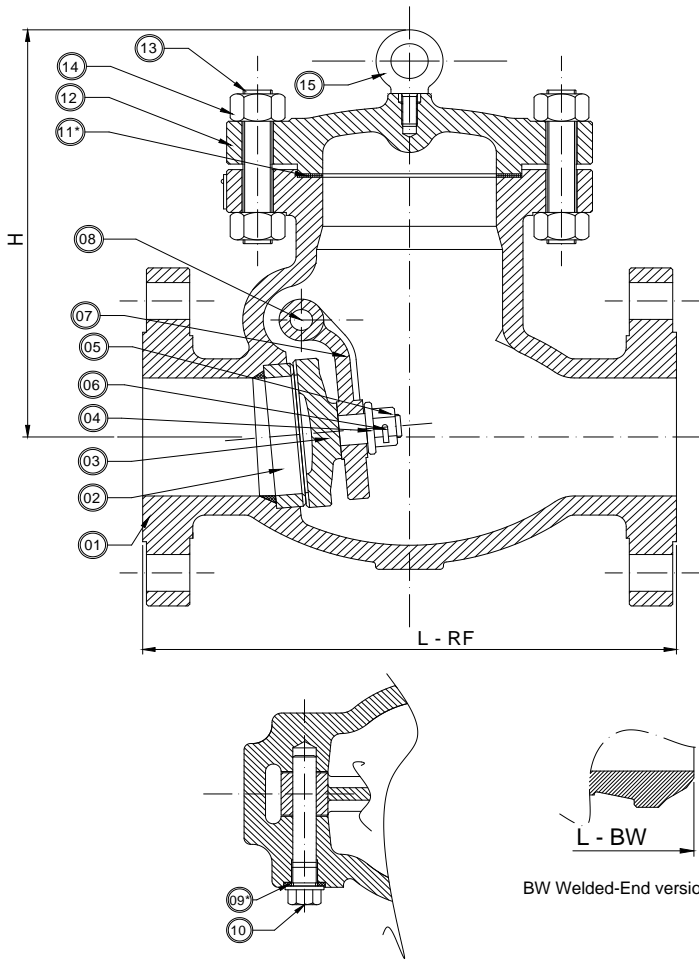

BASIC DESIGN STANDARDS

Basic Design BS 1868 / ANSI B16.34

Face to Face Dimension ANSI B16.10

Flanges Up to 24" ANSI B16.5
From 26" MSS SP44
ANSI B16.47 API 605

Butt-weld ends ANSI B16.25

Testing API 598

STANDARD DESCRIPTION

- Flow direction is stamped on body
- Bolted Cover Joint
- Welded Seat Ring
- Lifting Eyebolt from 30 Kg and heavier
- Special features according to Customer's requirement
- Suitable for vertical & horizontal installation
- Available accessories:
 - Outside lever with counter weight
 - Shock absorber (pneumatic cylinder)
 - Limit switch

TEST PRESSURE TO API 598 Psi/bar

Shell (water)	Seat (water)	Seat (air)
430 / 30	315 / 22	80 / 5,5

This document is the property of OPM ITALIA Srl. It must not be stored, reproduced or disclosed to others without written authorisation from the Company.

*** Recommended Spare Parts**

No	Part Name	TRIM NUMBER AS PER API 600								
		1	2	8	5	9	10	12	16	
02	Seat Ring	410	304	STL Gr.6	STL Gr.6	MONEL	316	316	STL Gr.6	
03	Disc			410	STL Gr.6				STL Gr.6	
04	Washer									
05	Disc Nut									
06	Pin								410	410
08	Disc Pin								316	
10	Plug									

BILL OF MATERIALS STANDARD ACCORDING TO ASTM

No	Part Name	Carbon Steel		Alloy Steel		Stainless Steel			
		WCB	LCB	WC6	C5	CF8	CF8M	CF3	CF3M
01	Body	A216 WCB	A352LCB	A217WC6	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M
07	Disc Hinge	A216 WCB	A352 LCB	A217 WC6	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M
12	Cover	A216 WCB	A352 LCB	A217 WC6	A217 C5	A351 CF8	A351 CF8M	A351 CF3	A351 CF3M
13	Bonnet Bolts	A193-B7	A320-L7	A193-B16		A193-B8			
14	Bonnet Nuts	A194-2H	A194-4	A194-4		A194-8			
11	Body / Cover Gasket	304 SS + Graphite inhibited							
09	Plug gasket	304 SS + Graphite inhibited							
15	Lifting Eyebolt	Iron Steel							

150 Lbs

SIZE		DIMENSION in mm			WEIGHT
Inches	mm	L (RF)	L (BW)	H	Kg
2"	50	203	203	150	17
2-1/2"	65	216	216	180	25
3"	80	241	241	190	29
4"	100	292	292	210	42
6"	150	356	356	275	74
8"	200	495	495	340	108
10"	250	622	622	355	177
12"	300	698	698	410	282
14"	350	787	787	475	372
16"	400	864	864	550	570
18"	450	978	978	600	685
20"	500	978	978	680	900
22"	550	1067	1067	720	---
24"	600	1295	1295	740	1359

CAST STEEL SWING CHECK VALVES CLASS 150#