


SIGHT GLASS 2 WINDOWS TYPE

PN 40

DT-SG-001

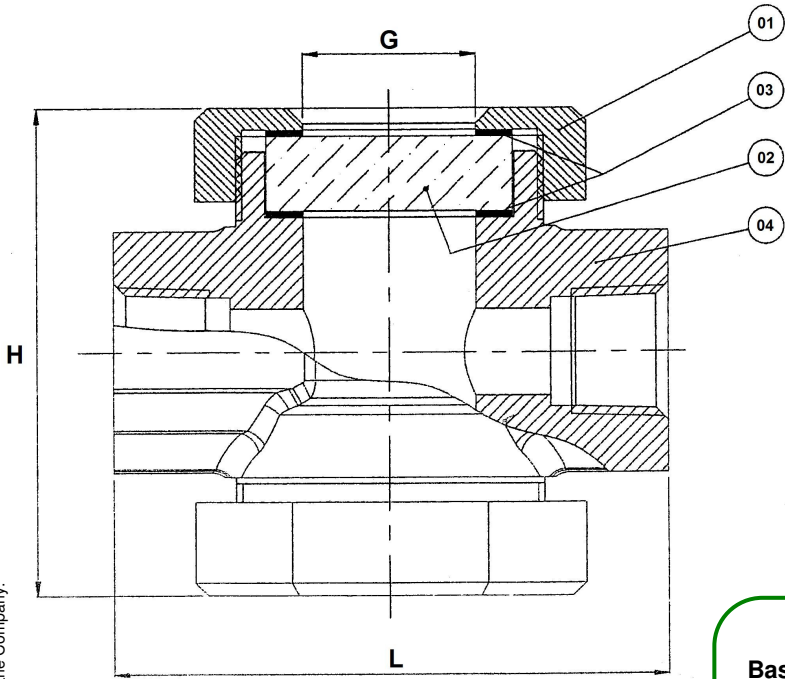

- STANDARD DESCRIPTION**
- Screwed Cover
 - Suitable for horizontal and vertical installation
 - Tempered or Borosilicate Glass
 - Special design, upon Customer's request.
 - Able to insert flow markers (ball/chain)
 - Temperate Glass (max T. 120 °C)
 - Borosilicate Glass (max T. 280 °C)

- BASIC DESIGN STANDARDS**
- Basic Design** Mfr Std
- Face to Face Dimension Ends** Manufacturer Standard
 SW as per ANSI B16.11
 NPT-F as per ANSI B1.20.1
- Testing** 1.1 RATING

* Recommended Spare Parts

BILL OF MATERIALS STANDARD ACCORDING TO ASTM					
No	Part Name	Carbon Steel		Stainless Steel	
		WCB	LCB	CF8	CF8M
01	Cover	A105N	A350-LF2	A182 F304	A182 F316
02	Glass	Tempered or borosilicate Glass			
03 (*)	Body / Cover Gasket	Graphoil			
046	Body	A216 WCB	A352 LCB	A351 CF8	A351 CF8M

SIZE	L	H	Ø G	Weight [Kgs]
1/2"	90	80	28	1,3
3/4"	90	80	28	1,3
1"	100	90	35	2,3
1-1/4"	127	110	55	3,5
1-1/2"	127	110	55	3,5
2"	140	125	65	5,0

This document is the property of OPM Italia Srl. It must not be stored, reproduced or disclosed to others without written authorisation from the Company.